


DHI-ITC114-PH1B

1.3Mega Parking Space Detector

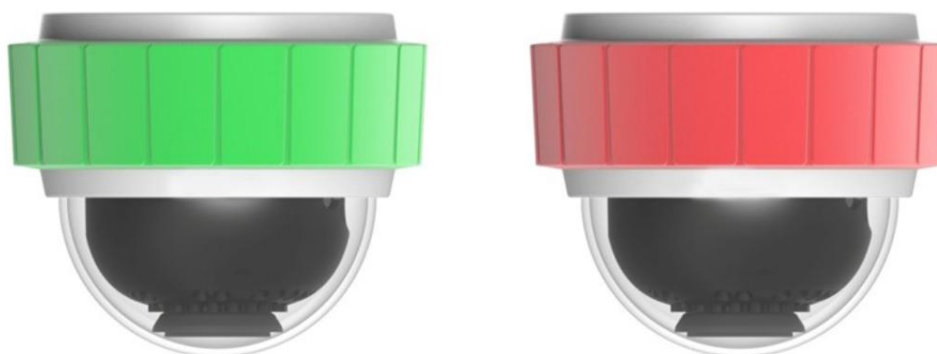

Order Information

DHI-ITC114-PH1B-F3, DHI-ITC114-PH1B-F6

Features

- Unique dual-streaming insure high quality photo output and video output.
- Advanced video compression technology, high compression rate, accurate and stable bit stream control
- Multi(dual) encoding streams and ACF (activity control frame) supported.
- Interactive design with parking space indicator, in in-ceiling installation.
- Indicator supports at least 7 colors which can be adjusted. It detects vehicle via video, plate recognition, and trigger parking indicator, showing if parking is idle or occupied.
- 1 parking space detector can simultaneously detect 2 spaces.

Technical Specifications



Parameter Type	Parameter Name	Value
Model		ITC114-PH1B
Camera	Sensor Type	1/3 inch CMOS
	Electronic Shutter	1/3s~1/10000s, may manually or auto adjust
	Day/Night	Electronic color to B/W
	White Balance	Auto
Image	Image Compression Standard	JPEG
	Image Resolution	1280×960
Video Parameter	Video Compression Standard	H.264
	Video Bit Stream	1.2Mbps~6Mbps

DHI-ITC114-PH1B

Parameter Type	Parameter Name	Value
Model		ITC114-PH1B
	Video Frame Rate	N/P standard switch PAL 1~25 fps (adjustable) N 1~30 fps (adjustable)
	Video Resolution	Main stream 1280x960 Sub stream 704x576
Function	Plate Recognition	Support
	Vehicle Parking Detection	Support, < 3 seconds
	Parking Indicator	7 colors, red, yellow, blue, green, cyan, white, pink; inter-control available
	Remote Control	Via WEB remote control
	OSD Info Overlay	Support, may customize time, location, parking no., parking status
	Network Link	Network same-link connection, built-in network bypass function, device failure or after outage, link can provide normal communication
	Watermark	Watermark and parity
	Record Mode	0~3 pic/vehicle, can set
Interface	Network Port	2, RJ45 10M/100M self-adaptive Ethernet port
	RS485 Port	1
	Lens Port	M12 (3.6 and 6mm lens optional)
Alarm Parameter	Alarm Output	1-ch
	Alarm Input	1-ch
General	Power	Standard DC 12V, range 8V~26V
	Consumption	< 6W
	Work Temperature	- 30°C ~ + 60°C
	Work Humidity	10%~90%
	Dimensions	Ø105mmx118mm
	Weight	0.5kg
	Installation	Dome design, in-ceiling bridge mount

Dimension (mm)

DHI-ITC114-PH1B

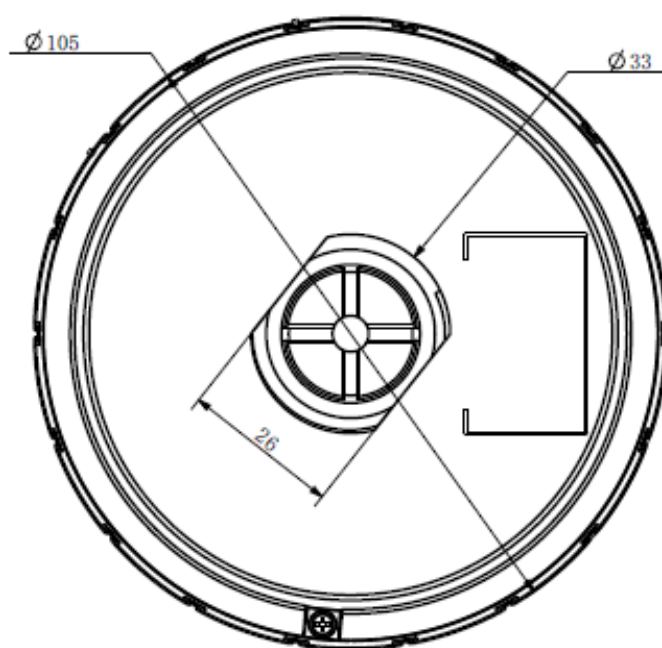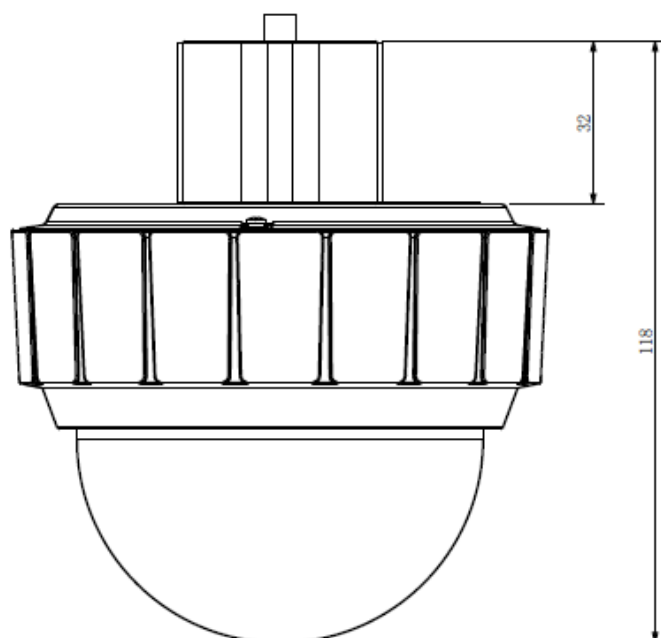

Dahua Technology Co., Ltd.

1199BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuasecurity.com

*Design and specifications are subject to change without notice.

© 2016Dahua Technology Co., Ltd.